
2133注氧仪英文说明书

尺寸: 90X130MM

Oxygen injection instrument

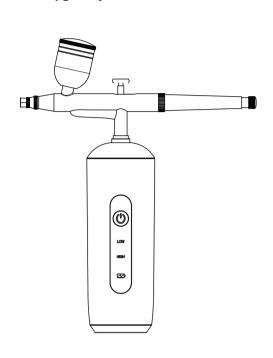

Instruction manual of oxygen injection instrument

catalogue

Product introduction 01
Product parameters 02
Product function 02
usage method
matters needing attention — — — — — — 04
Troubleshooting04
Product maintenance 05
Disposal of waste batteries – – – – – – 05
warranty card — — — — — — — — — — 06

Product introduction

1, Open key 5、Type-C Charging line


2, Injection key 6, injector

3、Charging port 7, Needle nut (adjust fog)

7

4、Spray gun 8、Essence bottle 9、Low gear 10, High gear

11, Power display




Product material

Product name

Charging time

Charging voltage

Product parameters



5V === 0.5A

working temperature | Normal temperature

About 3.5 hours

ABS+hardware

Oxygen injection instrument

B. Nano hydrating to improve skin texture Conventional water emulsion can only stay on the surface of the skin, that is, the stratum corneum, and can not penetrate the cell membrane, resulting in the long-term dryness and disorder of the bottom layer of the skin and tight skin. Using nano technology, decompose water molecules into micron molecules, spray gently, and enjoy a full sense of moisture on the whole face.

C. High pressure dredges the skin's water absorption channel The water oxygen meter is equivalent to a small pressure spray gun. Oxygen injection will stop the accumulation of oil in the pore space and fill the skin with water. The pore dirt will naturally be unable to stand, greatly improving the nutrient absorption.

-2-

usage method

Step 1:


Put the applicable medium into the water replenishing bottle, and the operating medium is mainly water agent; Suitable medium: essence, celestial water, pure dew, normal saline, toner and so on. If it is a viscous liquid, it must be diluted with distilled water / purified water / mineral water before use.

Step 2:

Press the on key to turn on the machine and the machine starts working.

Step 3:

Then press the spray button to carry out skin care. It is recommended that the essence fluid be imported 3 times a week for energy water / normal saline for daily



bottle and put ir the toner.

Swing this button back and forth to spray water mist and adjust the size of the mist





matters needing attention

- 1. Before initial use, please inject warm water / alcohol into the replenishment bottle to clean the inner wall of the spray gun. After cleaning, inject clean water for spraying for 2-3 times, empty spray after the clear water is drained, and air dry the internal pipeline.
- 2. The products used in the spray gun must be water-soluble products (products with high concentration and strong viscosity can only be used after being diluted with mineral water / purified water).
- 3. Each time the liquid / spray gun in the make-up bottle is replaced and has not been used for a long time, please follow the steps in point 1.
- 4. The liquid in the spray gun shall not stay for a long time. Try to inject it at the same time, and there shall be no residue after use. (avoid blockage / water leakage caused by liquid staying in the make-up bottle and spray gun for a long time).
- 5. When using the spray gun for the first time, please use it after it is fully charged. (the charging red light of the machine flashes, and the full light is on for a long time)
- 6. The machine cannot be used when charging. The machine can be operated normally only after unplugging the power supply.
- 7. Please use a qualified power adapter with an output above 5v-1A for charging.
- 8. Low power reminder function. When the product has no power, the power icon flashes five times to shut down

Troubleshooting

If the liquid cannot be ejected smoothly, check whether the

● The nozzle is not screwed in place; The liquid sprayed can not be foggy or spray free. -4After the spray gun, the tightening needle nut is screwed too tightly, and the needle nut can adjust the spray size.

-1-

- The liquid concentration / viscosity in the make-up bottle is too nigh (please use it after dilution)
- If there is dirt in the spray gun, please spray warm water to dredge the spray gun first.

Product maintenance


1. After using concentrated and viscous liquids, it is recommended to clean the inner wall of the spray gun with warm water / alcohol. After cleaning, inject clean water for cleaning and spraying for 2-3 times. After the clean water is drained, spray air and dry the internal pipeline. 2. Do not use volatile liquid to wipe the surface of the product (such as alcohol).

3. It is recommended to use soft flannel cloth. If it is not used for a long time, please clean the water replenishing bottle and spray $\operatorname{\mathsf{gun}}\nolimits$ in time to prevent blockage / water leakage in the water replenishing bottle and spray gun.

Disposal of waste batteries

- 1. When the oxygen injector reaches its service life, the internal battery may need to be removed according to the laws and regulations of the country or region where it is located. If the battery cannot be removed, please submit the product to the recycling center designated by the government.
- 2. Do not disassemble the product unless it is to be discarded. Premature disassembly will damage the product; Basic safety precautions shall be followed during operation. The power supply must be disconnected before removing the battery.
- 3. Before removing the battery, make sure that the battery is exhausted; If you need to run out of power, you can turn it on until it turns off
- $4.\ For\ correct\ recycling\ or\ disposal\ of\ batteries,\ please\ ask\ the\ recycling$ center designated by the local government whether to recycle other parts of the oxygen injection instrument.

5. Be careful not to short circuit the positive and negative poles of the battery. After taking out the battery, the product shall not be powered on again.



After sales card

Name	Telephone		
Address			
Product name	Product model	Product model	
Product number	Purchase date		
	Q	uality inspector	
		(\$\sqrt{\sq}\sqrt{\sq}}\sqrt{\sq}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}	
		Dealer seal	
		Control of the contro	

-6-

-3-